


INVERTED BUCKED STEAM TRAP

TERS KOVALI KONDENSTOP

DemirVana

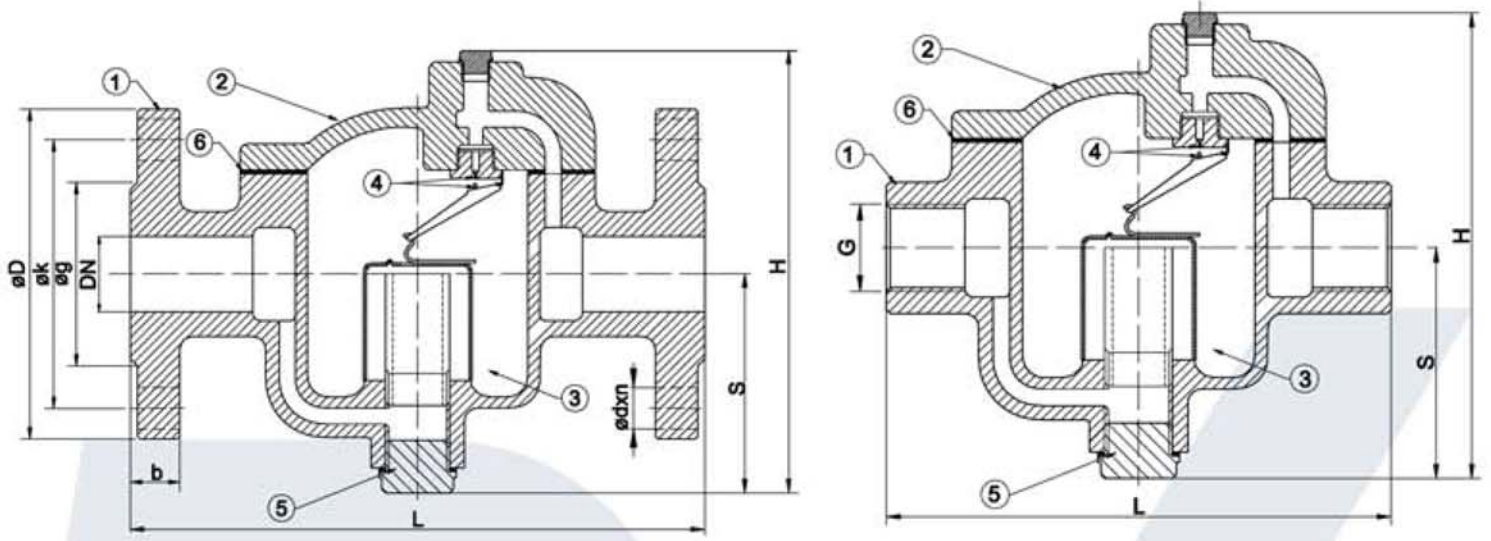

MALZEME ÖZELLİKLERİ / MATERIALS

PARÇA NO	PARÇA ADI	PART NAME	MALZEME	MATERIAL
1	GÖVDE	BODY	GG 25	GG 25
2	KAPAK	COVER	GG 25	GG 25
3	KOVA	BUCKET	PASLANMAZ ÇELİK	STAINLESS STEEL
4	ORİFİS	ORIFICE	PASLANMAZ ÇELİK	STAINLESS STEEL
5	TAPA	TAP	St37	St37
6	CONTA	GASKET	KLINGERIT	KLINGERIT

TERS KOVALI KONDENSTOP (FLANŞLI)

Inverted Bucket Steam Trap (Flanged)

Anma Basıncı Nominal Pressure	PN 16						
Anma Çapı Nominal Diameter	DN	15	20	25	32	40	50
Vana Boyutları Valve Diameter	L	170	180	195	205	245	280
	H	170	180	190	200	235	275
	S	90	95	100	105	120	130
	øD	95	105	115	140	150	165
	øk	65	75	85	100	110	125
	øg	46	56	65	76	84	99
	ød	14			19		
	b	14	16		18		20
n	4						
Ağırlık / Weight	Kg	5.5	6.4	8.1	9.9	15.8	24.9

TERS KOVALI KONDENSTOP (DİŞLİ)

Inverted Bucket Steam Trap (Threaded)

Anma Basıncı Nominal Pressure	PN 16						
Anma Çapı Nominal Diameter	DN	15	20	25	32	40	50
Vana Boyutları Valve Dimensions	G	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	L	140	150	170	180	220	245
	H	170	180	190	200	235	275
	S	90	95	100	105	120	130
Ağırlık / Weight	Kg	4.9	6.0	7.5	7.9	13.4	22.1

SICAKLIK / BASINÇ TEMPERATURE / PRESSURE					UYGULAMALAR • Doymuş buhar sistemleri	APPLICATIONS • Saturated steam applications
° C	-10..... + 120	200	250	300		
PN	16	13	11	10		



Demir Vana ve Kontrol Elemanları Makina San. Tic. Ltd. Şti

Merkez Ofis : İkitelli OSB Pik Dökümcüler San.Sit CA Blok No:3 Başakşehir/İstanbul

Tel : +90 212 297 57 30 Fax : +90 212 297 57 33 E-mail : dv@demirvana.com Web : www.demirvana.com